

# HART® field temperature transmitter

## Models TIF50, TIF52

WIKA data sheet TE 62.01



for further approvals  
see page 10



### Applications

- Plant construction
- Process engineering
- General industrial applications
- Oil and gas

### Special features

- Setting of units and measuring range possible on site (only model TIF52)
- Different hazardous area approvals
- The following settings are possible via external software:
  - Dual sensor, redundant measurement possible
  - Customer-specific characteristic curves programmable



Field temperature transmitters models TIF50, TIF52

### Description

The TIF series field temperature transmitters, consisting of a rugged field case, model T32 temperature transmitter and a model DIH display, have been designed for general use in process engineering.

They offer high accuracy, galvanic isolation and excellent protection against electromagnetic influences (EMI). Via HART® protocol, the TIFxx is configurable (interoperable) with a variety of open configuration tools.

In addition to the different sensor types, e.g. sensors in accordance with DIN EN 60751, JIS C1606, DIN 43760, IEC 60584 or DIN 43710, customer-specific sensor characteristics can also be defined, through the input of value pairs (user-defined linearisation). Through the configuration of a sensor with redundancy (dual sensor), on a sensor failure it will automatically change over to the working sensor.

Furthermore, there is the possibility to activate sensor drift detection. With this, an error signalling occurs when the magnitude of the temperature difference between sensor 1 and sensor 2 exceeds a user-selectable value.

The field temperature transmitter also has additional sophisticated supervisory functionality such as monitoring of the sensor lead resistance and sensor-break detection in accordance with NAMUR NE89 as well as monitoring of the measuring range. Moreover, these transmitters have comprehensive cyclic self-monitoring functionality.

Via the display it is possible to show range alarms as well as MIN and MAX values.

The field temperature transmitter is available in various field case variants. Stainless steel and aluminium can be specified.

It can be mounted directly on a wall. A pipe mounting kit is also available for fitting to pipes with a diameter of 1 ... 2".

The field temperature transmitters are delivered with a basic configuration or configured according to customer specifications.

# Specifications

Field temperature transmitter input							
Sensor type		Max. configurable measuring range <sup>1)</sup>	Standard	$\alpha$ values	Minimum measuring span <sup>14)</sup>	Typical measuring deviation <sup>2)</sup>	Temperature coefficient per °C typical <sup>3)</sup>
Resistance sensor	<b>Pt100</b>	-200 ... +850 °C	IEC 60751:2008	$\alpha = 0.00385$	10 K or 3.8 $\Omega$ (greater value applies)	$\leq \pm 0.12$ °C <sup>5)</sup>	$\leq \pm 0.0094$ °C <sup>6) 7)</sup>
	Pt(x) <sup>4)</sup> 10 ... 1000	-200 ... +850 °C	IEC 60751:2008	$\alpha = 0.00385$		$\leq \pm 0.12$ °C <sup>5)</sup>	$\leq \pm 0.0094$ °C <sup>6) 7)</sup>
	JPt100	-200 ... +500 °C	JIS C1606: 1989	$\alpha = 0.003916$		$\leq \pm 0.12$ °C <sup>5)</sup>	$\leq \pm 0.0094$ °C <sup>6) 7)</sup>
	Ni100	-60 ... +250 °C	DIN 43760: 1987	$\alpha = 0.00618$		$\leq \pm 0.12$ °C <sup>5)</sup>	$\leq \pm 0.0094$ °C <sup>6) 7)</sup>
	Resistance sensor	0 ... 8,370 $\Omega$				4 $\Omega$	$\leq \pm 1.68$ $\Omega$ <sup>8)</sup>
	Potentiometer <sup>9)</sup>	0 ... 100 %			10 %	$\leq 0.50$ % <sup>10)</sup>	$\leq \pm 0.0100$ % <sup>10)</sup>
Measuring current during measurement		Max. 0.3 mA (Pt100)					
Connection methods		1 sensor 2-/4-/3-wire or 2 sensors 2-wire (for further information, please refer to "Designation of connection terminals")					
Max. lead resistance		50 $\Omega$ each wire, 3-/4-wire					
Thermo-couple	Type J (Fe-CuNi)	-210 ... +1,200 °C	IEC 60584-1: 1995	50 K or 2 mV (greater value applies)	$\leq \pm 0.91$ °C <sup>11)</sup>	$\leq \pm 0.0217$ °C <sup>7) 11)</sup>	
	Type K (NiCr-Ni)	-270 ... +1,300 °C	IEC 60584-1: 1995		$\leq \pm 0.98$ °C <sup>11)</sup>	$\leq \pm 0.0238$ °C <sup>7) 11)</sup>	
	Type L (Fe-CuNi)	-200 ... +900 °C	DIN 43760: 1987		$\leq \pm 0.91$ °C <sup>11)</sup>	$\leq \pm 0.0203$ °C <sup>7) 11)</sup>	
	Type E (NiCr-Cu)	-270 ... +1,000 °C	IEC 60584-1: 1995		$\leq \pm 0.91$ °C <sup>11)</sup>	$\leq \pm 0.0224$ °C <sup>7) 11)</sup>	
	Type N (NiCrSi-NiSi)	-270 ... +1,300 °C	IEC 60584-1: 1995		$\leq \pm 1.02$ °C <sup>11)</sup>	$\leq \pm 0.0238$ °C <sup>7) 11)</sup>	
	Type T (Cu-CuNi)	-270 ... +400 °C	IEC 60584-1: 1995		$\leq \pm 0.92$ °C <sup>11)</sup>	$\leq \pm 0.0191$ °C <sup>7) 11)</sup>	
	Type U (Cu-CuNi)	-200 ... +600 °C	DIN 43710: 1985		$\leq \pm 0.92$ °C <sup>11)</sup>	$\leq \pm 0.0191$ °C <sup>7) 11)</sup>	
	Type R (PtRh-Pt)	-50 ... +1,768 °C	IEC 60584-1: 1995	150 K	$\leq \pm 1.66$ °C <sup>11)</sup>	$\leq \pm 0.0338$ °C <sup>7) 11)</sup>	
	Type S (PtRh-Pt)	-50 ... +1,768 °C	IEC 60584-1: 1995	150 K	$\leq \pm 1.66$ °C <sup>11)</sup>	$\leq \pm 0.0338$ °C <sup>7) 11)</sup>	
	Type B (PtRh-Pt)	0 ... +1,820 °C <sup>15)</sup>	IEC 60584-1: 1995	200 K	$\leq \pm 1.73$ °C <sup>11)</sup>	$\leq \pm 0.0500$ °C <sup>7) 12)</sup>	
<i>mV sensor</i>		-500 ... +1,800 mV		4 mV	$\leq \pm 0.33$ mV <sup>13)</sup>	$\leq \pm 0.0311$ mV <sup>7) 13)</sup>	
Connection methods		1 sensor or 2 sensors (for further information, please refer to "Designation of connection terminals")					
Max. lead resistance		5 k $\Omega$ each wire					
Cold junction compensation, configurable		internal compensation or external with Pt100, with thermostat or off					

1) Other units e.g. °F and K possible

2) Measuring deviations (input + output) at ambient temperature 23 °C  $\pm$  3 K, without influence of lead resistances; for example calculations see page 5

3) Temperature coefficients (input + output) per °C

4) x configurable between 10 ... 1,000

5) Based on 3-wire Pt100, Ni100, 150 °C MV

6) Based on 150 °C MV

7) In the ambient temperature range -40 ... +85 °C

8) Based on a sensor with max. 5 k $\Omega$

9) Rtotal: 10 ... 100 k $\Omega$

10) Based on a potentiometer value of 50 %

11) Based on 400 °C MV with cold junction compensation error

12) Based on 1,000 °C MV with cold junction compensation error

13) Based on measuring range 0 ... 1 V, 400 mV MV

14) The transmitter can be configured below these limits, but this is not recommended due to loss of accuracy.

15) Specifications valid only for measuring range between 450 ... 1,820 °C

MV = measured value (temperature measured values in °C)

## Note:

The transmitter can be configured below these limits, but this is not recommended due to loss of accuracy.

The selection of the sensor is only possible via the HART® software (e.g. WIKA\_T32) or the HART® communicator (e.g. FC475, MFC4150).

WIKA configuration software WIKA\_T32: Free download from [www.wika.com](http://www.wika.com)

## User linearisation

Via software, customer-specific sensor characteristics can be stored in the transmitter, so that further sensor types can be used. Number of data points: Minimum 2; maximum 30

## Monitoring functionality with 2 sensors connected (dual sensor)

### Redundancy

In the case of a sensor error (sensor break, lead resistance too high or outside the measuring range of the sensor) of one of the two sensors, the process value will be only based on the error-free sensor. Once the error is rectified, the process value will again be based on the two sensors or on sensor 1.

### Ageing control (sensor-drift monitoring)

An error signal on the output is activated if the value of the temperature difference between sensor 1 and sensor 2 is higher than a set value, which can be selected by the user. This monitoring only generates a signal if two valid sensor values can be determined and the temperature difference is higher than the selected limit value.  
(Cannot be selected for the "Difference" sensor function, since the output signal already indicates the difference value).

## Sensor functionality when 2 sensors have been connected (dual sensor)

### Sensor 1, sensor 2 redundant

The 4 ... 20 mA output signal delivers the process value of sensor 1. If sensor 1 fails, the process value of sensor 2 is output (sensor 2 is redundant).

### Mean value

The 4 ... 20 mA output signal delivers the mean value of the two values from sensor 1 and sensor 2. If one sensor fails, the process value of the error-free sensor is output.

### Minimum value

The 4 ... 20 mA output signal delivers the lower of the two values from sensor 1 and sensor 2. If one sensor fails, the process value of the error-free sensor is output.

### Maximum value

The 4 ... 20 mA output signal delivers the higher of the two values from sensor 1 and sensor 2. If one sensor fails, the process value of the error-free sensor is output.

### Difference

The 4 ... 20 mA output signal delivers the difference between sensor 1 and sensor 2. If one sensor fails, an error signalling will be activated.

Display, operating unit	Model TIF50	Model TIF52
Display principle	LCD, rotatable in 10° steps	
Measured value of display	7-segment LCD, 5-digit, character size 9 mm	
Bar graph	20-segment LCD	
Info line	14-segment LCD, 6-digit, character size 5.5 mm	
Status indicators	♥ : HART® mode (signalling of HART® parameter adoption) 🔑 : Unit lock ⚠ : Warnings or error messages	
Indication range	-9999 ... 99999	
Measuring rate	approx. 4/s	
Accuracy	±0.1 % of measuring span	±0.05 % of measuring span
Temperature coefficient	±0.1 % of measuring span / 10 K	
HART® functionality		
■ Access control	-	Secondary master
■ Automatically set parameters		
■ Available commands	-	Unit, measuring range start/end, format, zero point, span, damping, polling address
■ Identified commands	Generic mode: 1, 15, 35, 44	Generic mode: 0, 1, 6, 15, 34, 35, 36, 37, 44
■ Multidrop	Not supported	Measured values are automatically taken from the HART® digital data and displayed

## Rise time, damping, measuring rate

Rise time $t_{90}$	Approx. 0.8 s
<b>Damping</b> , configurable	<b>Off</b> ; configurable between 1 s and 60 s
Switch-on time (time to get the first measured value)	Max. 15 s
Measuring rate <sup>1)</sup>	Measured value update approx. 3/s

### Bold: Basic configuration

1) Valid only for RTD/single thermocouple sensor

Analogue output, output limits, signalling, insulation resistance		
Analogue output, configurable	<b>Linear to temperature per IEC 60751 / JIS C1606 / DIN 43760</b> (for resistance sensors) or linear to temperature per IEC 584 / DIN 43710 (for thermocouples) 4 ... 20 mA or 20 ... 4 mA, 2-wire	
Output limits, configurable per NAMUR NE43 customer-specifically adjustable	Lower limit <b>3.8 mA</b> 3.6 ... 4.0 mA	upper limit <b>20.5 mA</b> 20.0 ... 21.5 mA
Current value for signalling, configurable per NAMUR NE43 Substitute value	<b>Downscale</b> <b>&lt; 3.6 mA (3.5 mA)</b> 3.5 ... 12.0 mA	upscale > 21.0 mA (21.5 mA) 12.0 ... 23.0 mA
In simulation mode, independent from input signal, simulation value configurable from 3.5 ... 23.0 mA		
Load R <sub>A</sub> (without HART®)	R <sub>A</sub> ≤ (U <sub>B</sub> - 13.5 V) / 0.023 A with R <sub>A</sub> in Ω and U <sub>B</sub> in V	
Load R <sub>A</sub> (with HART®)	R <sub>A</sub> ≤ (U <sub>B</sub> - 14.5 V) / 0.023 A with R <sub>A</sub> in Ω and U <sub>B</sub> in V	
Insulation voltage (input to analogue output)	AC 1,200 V (50 Hz / 60 Hz); 1 s	
Insulation specification to DIN EN 60664-1:2003	Overvoltage category III	

**Bold: Basic configuration**

Explosion protection, power supply					
Model	Approvals	Permissible ambient/storage temperature (in accordance with the relevant temperature classes)	Safety-related maximum values		Power supply U <sub>B</sub> (DC)
			Sensor (Connections 1 - 4)	Current loop (Connections ±)	
<b>TIF50-S,</b> <b>TIF52-S</b>	without	{-50} -40 ... +85 °C	-	-	14.5 ... 42 V
<b>TIF50-F,</b> <b>TIF52-F</b>	Flameproof enclosure BVS 10 ATEX E 158 IECEX BVS 10.0103 II 2G Ex db IIC T4/T5/T6 Gb Ex db IIC T4/T5/T6 Gb	-40 ... +85 °C at T4 -40 ... +75 °C at T5 -40 ... +60 °C at T6	-	U <sub>M</sub> = 30 V P <sub>M</sub> = 2 W	14.5 ... 30 V
<b>TIF50-F,</b> <b>TIF52-F</b>	Flameproof enclosure TC RU C-DE.BH02.B.00466/20 1 Ex d IIC T6 ... T4	-60 <sup>2)</sup> / -40 ... +85 °C at T4 -60 <sup>2)</sup> / -40 ... +75 °C at T5 -60 <sup>2)</sup> / -40 ... +60 °C at T6	-	U <sub>M</sub> = 30 V P <sub>M</sub> = 2 W	14.5 ... 30 V
<b>TIF50-I,</b> <b>TIF52-I</b>	Intrinsically safe equipment <sup>1)</sup> BVS 16 ATEX E 112 X IECEX BVS 16.0075X II (1)2G Ex ia [ia Ga] IIC T4/T5/T6 Gb II 2G Ex ia IIC T4/T5/T6 Gb II (1)2D Ex ia [ia Da] IIIC T135 °C Db II 2D Ex ia IIIC T135 °C Db	-40 ... +85 °C at T4 -40 ... +70 °C at T5 -40 ... +55 °C at T6 -40 ... +40 °C (P <sub>i</sub> = 680 mW) -40 ... +70 °C (P <sub>i</sub> = 650 mW)	see installation drawing in the operating instructions at <a href="http://www.wika.com">www.wika.com</a>	see installation drawing in the operating instructions at <a href="http://www.wika.com">www.wika.com</a>	14.5 ... 29 V
<b>TIF50-I,</b> <b>TIF52-I</b>	Intrinsically safe equipment <sup>1)</sup> TC RU C-DE.AA45.B.00918 0 Ex ia IIC T4/T5/T6 1 Ex ib [ia ] IIC T4/T5/T6 DIP A20 Ta 120 °C DIP A21 Ta 120 °C	-60 <sup>2)</sup> / -40 ... +85 °C at T4 -60 <sup>2)</sup> / -40 ... +70 °C at T5 -60 <sup>2)</sup> / -40 ... +55 °C at T6 -60 <sup>2)</sup> / -40 ... +40 °C (P <sub>i</sub> = 680 mW) -60 <sup>2)</sup> / -40 ... +70 °C (P <sub>i</sub> = 650 mW)	see installation drawing in the operating instructions at <a href="http://www.wika.com">www.wika.com</a>	see installation drawing in the operating instructions at <a href="http://www.wika.com">www.wika.com</a>	14.5 ... 29 V

1) The installation conditions for the transmitters and displays must be considered for the final application.

2) Special version on request (only available with specific approvals)

Measuring deviation, temperature coefficient, long-term stability					
Effect of load		Not measurable			
Power supply effect		Not measurable			
Warm-up time		After approx. 5 minutes the instrument will function to the specifications (accuracy)			
Input	Measuring deviation per DIN EN 60770, 23 °C ±3 K	Mean temperature coefficient (TC) for each 10 K change in ambient temperature in the range -40 ... +85 °C	Lead resistance effects	Long-term stability after 1 year	
■ Resistance thermometer Pt100/JPt100/ Ni100 <sup>1)</sup>	-200 °C ≤ MV ≤ 200 °C: ±0.10 K MV > 200 °C: ±(0.1 K + 0.01 % IMW-200 K) <sup>2)</sup>	±(0.06 K + 0.015 % MV)	4-wire: no effect (0 to 50 Ω each wire) 3-wire: ±0.02 Ω / 10 Ω (0 to 50 Ω each wire) 2-wire: Resistor of the connection lead <sup>3)</sup>	±60 mΩ or 0.05 % of MV, greater value applies	
■ Resistance sensor	≤ 890 Ω: 0.053 Ω <sup>4)</sup> or 0.015 % MV <sup>5)</sup> ≤ 2,140 Ω: 0.128 Ω <sup>4)</sup> or 0.015 % MV <sup>5)</sup> ≤ 4,390 Ω: 0.263 Ω <sup>4)</sup> or 0.015 % MV <sup>5)</sup> ≤ 8,380 Ω: 0.503 Ω <sup>4)</sup> or 0.015 % MV <sup>5)</sup>	±(0.01 Ω + 0.01 % MV)			
■ Potentiometer	R <sub>part</sub> /R <sub>total</sub> is max. ±0.5 %	±(0.1 % MV)		±20 μV or 0.05 % of MV, greater value applies	
■ Thermocouples Type E, J	-150 °C < MV < 0 °C: ±(0.3 K + 0.2 % IMVI) MV > 0 °C: ±(0.3 K + 0.03 % MV)	Type E: MV > -150 °C: ±(0.1 K + 0.015 % IMVI) Type J: MV > -150 °C: ±(0.07 K + 0.02 % IMVI)	6 μV / 1,000 Ω <sup>6)</sup>		
Type T, U	-150 °C < MV < 0 °C: ±(0.4 K + 0.2 % IMVI) MV > 0 °C: ±(0.4 K + 0.01 % MV)	-150 °C < MV < 0 °C: ±(0.07 K + 0.04 % MV) MV > 0 °C: ±(0.07 K + 0.01 % MV)			
Type R, S	50 °C < MV < 400 °C: ±(1.45 K + 0.12 % IMV - 400 KI) 400 °C < MV < 1,600 °C: ±(1.45 K + 0.01 % IMV - 400 KI)	Type R: 50 °C < MV < 1,600 °C: ±(0.3 K + 0.01 % IMV - 400 KI) Type S: 50 °C < MV < 1,600 °C: ±(0.3 K + 0.015 % IMV - 400 KI)			
Type B	450 °C < MV < 1,000 °C: ±(1.7 K + 0.2 % IMV - 1,000 KI) MV > 1,000 °C: ±1.7 K	450 °C < MV < 1,000 °C: ±(0.4 K + 0.02 % IMV - 1,000 KI) MV > 1,000 °C: ±(0.4 K + 0.005 % (MV - 1,000 K))			
Type K	-150 °C < MV < 0 °C: ±(0.4 K + 0.2 % IMVI) 0 °C < MV < 1,300 °C: ±(0.4 K + 0.04 % MV)	-150 °C < MV < 1,300 °C: ±(0.1 K + 0.02 % IMVI)			
Type L	-150 °C < MV < 0 °C: ±(0.3 K + 0.1 % IMVI) MV > 0 °C: ±(0.3 K + 0.03 % MV)	-150 °C < MV < 0 °C: ±(0.07 K + 0.02 % IMVI) MV > 0 °C: ±(0.07 K + 0.015 % MV)			
Type N	-150 °C < MV < 0 °C: ±(0.5 K + 0.2 % IMVI) MV > 0 °C: ±(0.5 K + 0.03 % MV)	-150 °C < MV < 0 °C: ±(0.1 K + 0.05 % IMVI) MV > 0 °C: ±(0.1 K + 0.02 % MV)			
■ mV sensor	≤ 1,160 mV: 10 μV + 0.03 % IMVI > 1,160 mV: 15 μV + 0.07 % IMVI	2 μV + 0.02 % IMVI 100 μV + 0.08 % IMVI			
■ Cold junction <sup>7)</sup>	±0.8 K	±0.1 K			
<b>Output</b>	±0.03 % of measuring span	±0.03 % of measuring span			±0.05 % of span

### Total measuring deviation

Addition: Input + output per DIN EN 60770, 23 °C ± 3 K

MV = measured value (temperature measured values in °C)

Measuring span = configured end of measuring range - configured start of measuring range

- 1) For sensor Pt<sub>x</sub> (x = 10 ... 1,000) applies:  
for x ≥ 100: Permissible error, as for Pt100  
for x < 100: Permissible error, as for Pt100 with a factor (100/x)

- 2) Additional error for resistance thermometers in a 3-wire configuration with zero-balanced cable: 0.05 K

- 3) The specified resistance value of the sensor wire can be subtracted from the calculated sensor resistance.

Dual sensor: Configurable for each sensor separately

- 4) Double value at 3-wire

- 5) Greater value applies

- 6) Within a range of 0 ... 10 kΩ lead resistance

- 7) Only for thermocouple

#### Basic configuration:

Input signal: Pt100 in 3-wire connection, measuring range: 0 ... 150 °C

## Example calculation

Pt100 / 4-wire / measuring range 0 ... 150 °C / ambient temperature 33 °C	
Input Pt100, MV < 200 °C	±0.100 K
Output ±(0.03 % of 150 K)	±0.045 K
TC 10 K - input ±(0.06 K + 0.015 % of 150 K)	±0.083 K
TC 10 K - output ±(0.03 % of 150 K)	±0.045 K
<b>Measuring deviation (typical)</b> $\sqrt{\text{input}^2 + \text{output}^2 + \text{TC}_{\text{input}}^2 + \text{TC}_{\text{output}}^2}$	<b>±0.145 K</b>
<b>Measuring deviation (maximum)</b> (input + output + TC <sub>input</sub> + TC <sub>output</sub> )	<b>±0.273 K</b>

Thermocouple type K / measuring range 0 ... 400 °C / internal compensation (cold junction) / ambient temperature 23 °C	
Input type K, 0 °C < MV < 1,300 °C ±(0.4 K + 0.04 % of 400 K)	±0.56 K
Cold junction ±0.8 K	±0.80 K
Output ±(0.03 % of 400 K)	±0.12 K
<b>Measuring deviation (typical)</b> $\sqrt{\text{input}^2 + \text{cold junction}^2 + \text{output}^2}$	<b>±0.98 K</b>
<b>Measuring deviation (maximum)</b> (input + cold junction + output)	<b>±1.48 K</b>

Monitoring	
<b>Test current for sensor monitoring</b> <sup>1)</sup>	Nom. 20 µA during test cycle, otherwise 0 µA
<b>Monitoring NAMUR NE89 (monitoring of input lead resistance)</b>	
■ Resistance thermometer (Pt100, 4-wire)	R <sub>L1</sub> + R <sub>L4</sub> > 100 Ω with hysteresis 5 Ω R <sub>L2</sub> + R <sub>L3</sub> > 100 Ω with hysteresis 5 Ω
■ Thermocouple	R <sub>L1</sub> + R <sub>L4</sub> + R <sub>thermocouple</sub> > 10 kΩ with hysteresis 100 Ω
<b>Sensor break monitoring</b>	Always active
<b>Self-monitoring</b>	Active permanently, e.g. RAM/ROM test, logical program operating checks and validity check
<b>Measuring range monitoring</b>	Monitoring of the set measuring range for upper/lower deviations Standard: Deactivated
<b>Monitoring of input lead resistance (3-wire)</b>	Monitoring of the resistance difference between lead 3 and 4; an error will be indicated if there is a difference of > 0.5 Ω between leads 3 and 4

1) Only for thermocouple

Field case	
<b>Material</b>	<ul style="list-style-type: none"> <li>■ Aluminium, window from polycarbonate</li> <li>■ Stainless steel, window from polycarbonate</li> </ul>
<b>Colour</b>	Aluminium: Night blue, RAL 5022      Stainless steel: Silver
<b>Cable bushings</b>	3 x M20 x 1.5 or 3 x ½ NPT
<b>Ingress protection</b>	IP66
<b>Weight</b>	Aluminium: approx. 1.5 kg      Stainless steel: approx. 3.7 kg
<b>Dimensions</b>	See drawing

Ambient conditions	
Ambient temperature	-60 <sup>1)</sup> / -40 ... +85 °C
Functional area of the display	-20 <sup>2)</sup> ... +70 °C
Climate class per IEC 654-1: 1993	Cx (-20 ... +85 °C, 35 ... 85 % r. h., non-condensing)
Maximum permissible humidity	93 % r. h. ±3 %
Vibration resistance per IEC 60068-2-6:2007	3 g
Shock resistance per IEC 68-2-27: 1987	30 g
Electromagnetic compatibility (EMC)	EN 61326 emission (group 1, class B) and interference immunity (industrial application), and also NAMUR NE21

1) Special version on request (only available with specific approvals)

2) In previous ambient temperatures < -20 °C a delayed recovery of the indication function could be expected, especially in case of low loop current.

### Communication HART® protocol rev. 5 including burst mode and multidrop

Interoperability (i.e. compatibility between components from different manufacturers) is a strict requirement of HART® instruments. The field transmitter is compatible with almost every open software and hardware tool; among other things with:

1. User-friendly WIKA configuration software, free-of-charge download via [www.wika.com](http://www.wika.com)

2. HART® communicator FC375, FC475, MFC4150, MFC5150, Trex:

T32 device description integrated

3. Asset Management Systems

3.1 AMS: T32\_DD completely integrated and upgradable with old versions

3.2 Simatic PDM: T32\_EDD completely integrated from version 5.1, upgradable with version 5.0.2

3.3 Smart Vision: DTM upgradable per FDT standard from SV version 4

3.4 PACTware: DTM completely integrated and upgradable as well as all supporting applications with FDT interface

3.5 Field Mate: DTM upgradable

### Attention:


For direct communication via the serial interface of a PC/notebook, a HART® modem is needed (see "Accessories").

As a general rule, parameters which are defined in the scope of the universal HART® commands (e.g. the measuring range) can, in principle, be edited with all HART® configuration tools.

### Load diagram

The permissible load depends on the loop supply voltage.


Load  $R_A \leq (U_B - 13.5 \text{ V}) / 0.023 \text{ A}$  with  $R_A$  in  $\Omega$  and  $U_B$  in V (without HART®)

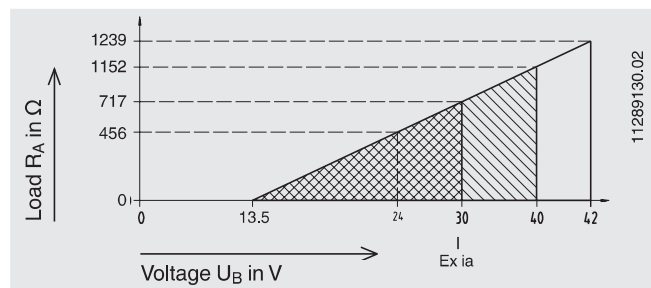


## Designation of connection terminals

 **Analogue output**

4 ... 20 mA loop

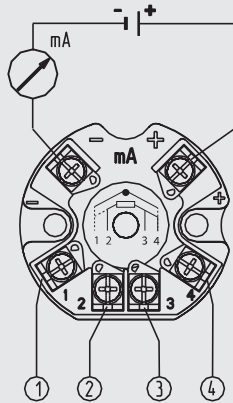


Identical dual sensors are supported for all sensor types, i. e. dual sensor combinations as for example Pt100/Pt100 or thermocouple type K/type K are possible. A further rule is that both sensor values have the same unit and the same sensor range.


 **Input resistance sensor / thermocouple**

Thermocouple


Cold junction with external Pt100



Resistance thermometer / resistance sensor in




Potentiometer



Dual thermocouple  
Dual mV sensor




Dual resistance thermometer / dual resistance sensor in  
2+2-wire



For the HART® modem, connection terminals are available for the head-mounted case and additional terminals are available for the rail-mounted case.

11234547.0X

## Electrical connection

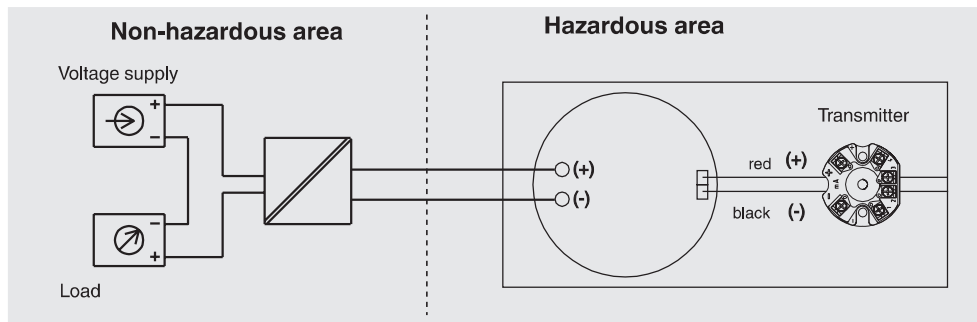

Legend:

 Voltage supply


 Load

(-) Supply minus

(+) Supply plus


 2-wire connection

## User interface

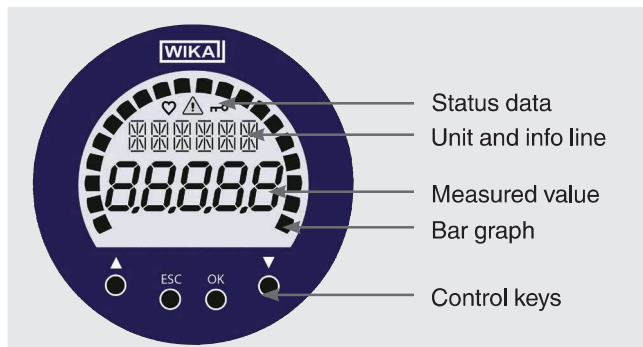





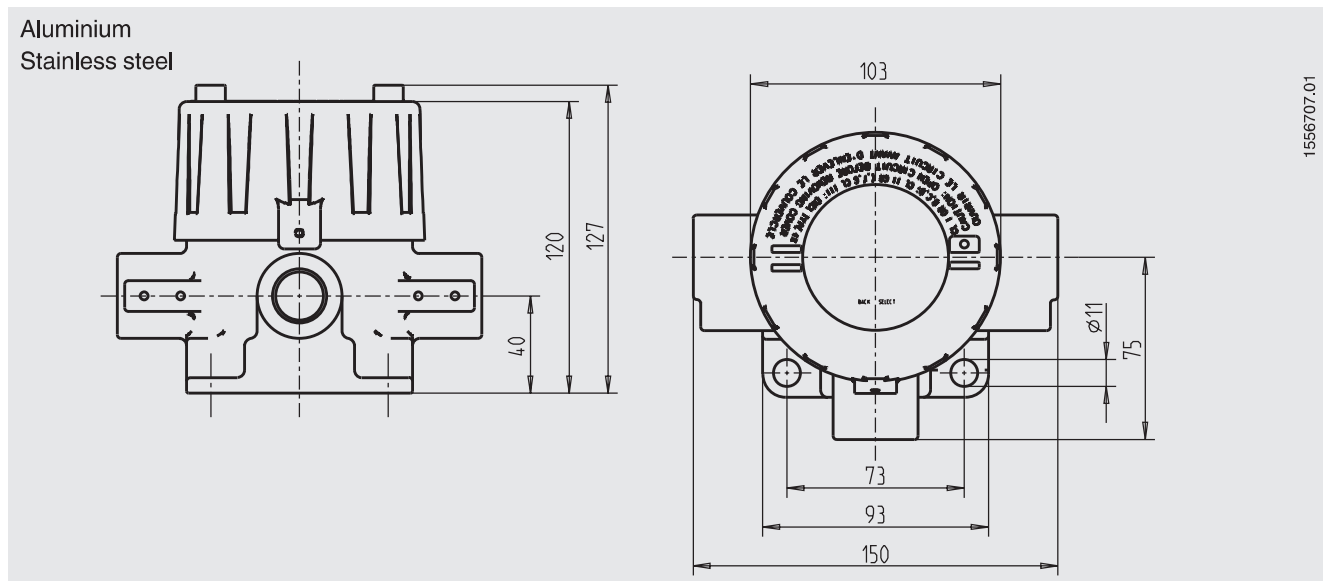



## Dimensions in mm











## Accessories

Model	Description	Order number
<b>Programming unit, model PU-H</b>		
VIATOR® HART® USB 	HART® modem for USB interface	11025166
VIATOR® HART® USB PowerXpress™ 	HART® modem for USB interface	14133234
VIATOR® HART® RS-232 	HART® modem for RS-232 interface	7957522
VIATOR® HART® Bluetooth® Ex 	HART® modem for Bluetooth interface, Ex	11364254
<b>Magnetic quick connector magWIK</b> 	<ul style="list-style-type: none"> <li>■ Replacement for crocodile clips and HART® terminals</li> <li>■ Fast, safe and tight electrical connection</li> <li>■ For all configuration and calibration processes</li> </ul>	14026893

## Approvals

Logo	Description	Region
	<b>EU declaration of conformity</b>	European Union
	EMC directive EN 61326 emission (group 1, class B) and interference immunity (industrial application)	
	RoHS directive	

### Optional approvals

Logo	Description	Region
	<b>EU declaration of conformity</b>	European Union
	ATEX directive Hazardous areas	
	<b>IECEx</b> Hazardous areas	International
	<b>EAC</b>	Eurasian Economic Community
	EMC directive	
	Hazardous areas <sup>1)</sup>	
	<b>PAC Russia</b> Metrology, measurement technology	Russia
	<b>PAC Kazakhstan</b> Metrology, measurement technology	Kazakhstan
-	<b>MChS</b> Permission for commissioning	Kazakhstan
	<b>PAC Belarus</b> Metrology, measurement technology	Belarus
	<b>PAC Ukraine</b> Metrology, measurement technology	Ukraine
	<b>DNOP - MakNII</b>	Ukraine
	Mining	
	Hazardous areas	
-	<b>PESO</b> Hazardous areas	India

1) The installation conditions for the transmitters must be considered for the final application.

## Manufacturer's information and certifications

Logo	Description
-	<b>China RoHS directive</b>

## Certificates (option)

Certificates	
<b>Certificates</b>	<ul style="list-style-type: none"> <li>■ 2.2 test report</li> <li>■ 3.1 inspection certificate</li> </ul>
<b>Calibration</b>	<ul style="list-style-type: none"> <li>■ DAkkS calibration certificate</li> </ul>

→ Approvals and certificates, see website

## Ordering information

Model / Explosion protection / Case material / Transmitter / Cable bushings / Threaded connection for cable bushing /  
Certificates / Options

© 04/2011 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.



**WIKAL Alexander Wiegand SE & Co. KG**  
Alexander-Wiegand-Straße 30  
63911 Klingenberg/Germany  
Tel. +49 9372 132-0  
Fax +49 9372 132-406  
info@wika.de  
www.wika.de